	DIMENSIONS (Cm)	Effective 98 x 56 x h.77
		On Pallet 112 x 75 x h.95
	WEIGHT (Kg)	Effective 400
		On Pallet 410
	OIL	With viscosity = 680
		Quantity = 2 lt.
ELECTRIC MOTOR	400V - 50HZ	
	4 HP - 3 kW	
RPM	40	


Cutting capability	R. = 65 Kg. / mm ²			R. = 85 Kg. / mm ²		
	1 Ø 34	2 Ø 28	3 Ø 22	1 Ø 32	2 Ø 22	3 Ø 18

TECHNICAL FEATURES

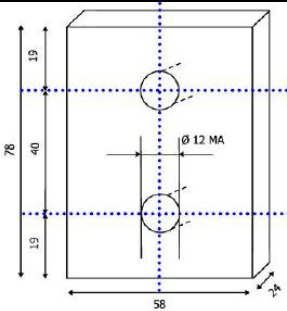
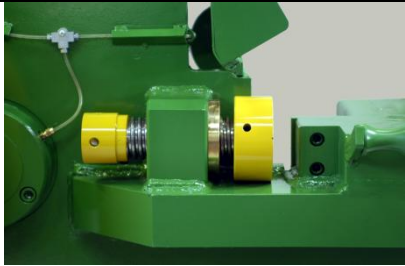

- Completely new projected machine body in monoblock made of spheroidal cast iron;
- Gearing in cemented steel;
- Reinforced mechanical parts for a better resistance and performance;
- Higher Cutting capability;
- Special Screw Locator to align perfectly one or more rod between the blades.

OPTIONAL

BASE AND PEDAL
This system is recommended when a working bench is used to lay the bars, allowing the operator to work maintaining a correct posture and minimizing the effort.



STANDARD EQUIPMENT

		
<p>BLADES On each cutting machine, 2 hardened steel blades are already fitted.</p>	<p>SCREW LOCATOR Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.</p>	<p>LUBRIFICATION SYSTEM Thanks to the new construction system, the parts that require it are easily reached by a single point of grazing.</p>