
	DIMENSIONS (Cm)	Effective 130 x 71 x h.92
		On Pallet 130 x 75 x h.100
	WEIGHT (Kg)	Effective 730
		On Pallet 745
	OIL	With viscosity = 680 Quantity = 4 lt.
	ELECTRIC MOTOR	400V - 50HZ 5,5 HP - 4 kW
RPM	40	

Cutting capability	R. = 65 Kg. / mm²			R. = 85 Kg. / mm²		
	1 Ø 44	2 Ø 30	3 Ø 24	1 Ø 36	2 Ø 26	3 Ø 22

STANDARD EQUIPMENT

BLADES

On each cutting machine, 2 hardened steel blades are already fitted.

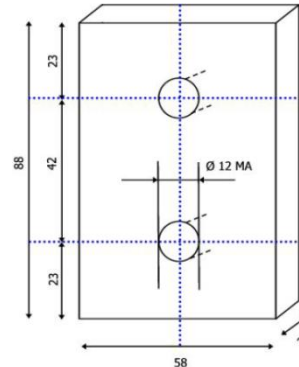


OPTIONAL



LUBRICATING PUMP

With manual flow adjuster, for constant and easy lubrication of all the parts subjected to a possible block.

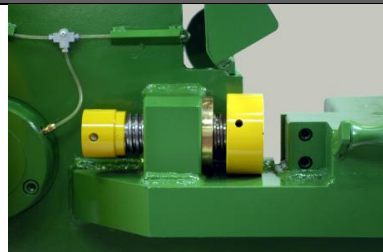

SCREW LOCATOR

Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.



BASE AND PEDAL

Indicato per chi desidera appoggiare le barre su un piano rialzato permettendo così all'operatore di lavorare mantenendo una postura corretta e riducendo al minimo lo sforzo.