
	DIMENSIONS (Cm)	Effective 130 x 71 x h.95
		On Pallet 130 x 75 x h.110
	WEIGHT (Kg)	Effective 740
		On Pallet 755
	OIL	With viscosity = 680
		Quantity = 4 lt.
ELECTRIC MOTOR	400V - 50HZ	
	7,5 HP - 5,5 kW	
RPM	40	

Cutting capability	R. = 65 Kg. / mm²			R. = 85 Kg. / mm²		
	1 Ø 46	2 Ø 32	3 Ø 26	1 Ø 40	2 Ø 30	3 Ø 22

STANDARD EQUIPMENT

BLADES

On each cutting machine, 2 hardened steel blades are already fitted.

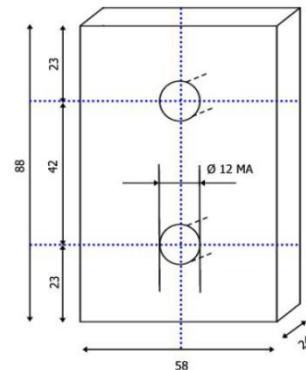


OPTIONAL



LUBRICATING PUMP

With manual flow adjuster, for constant and easy lubrication of all the parts subjected to a possible block.

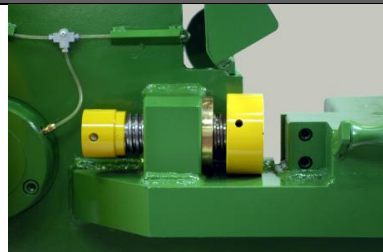

SCREW LOCATOR

Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.



BASE AND PEDAL

This system is recommended when a working bench is used to lay the bars, allowing the operator to work maintaining a correct posture and minimizing the effort.