
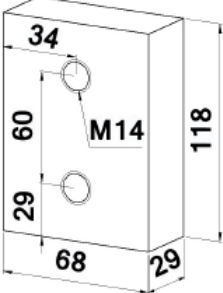
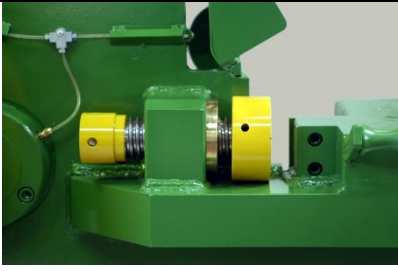

	DIMENSIONS (Cm)	Effective 152 x 85 x h.110
		On Pallet 155 x 105 x h.120
	WEIGHT (Kg)	Effective 1280
		On Pallet 1320
	OIL	With viscosity = 680 Quantity = 8 lt.
	ELECTRIC MOTOR	400V - 50HZ 10 HP - 7,5 kW
RPM	30	

Cutting capability	R. = 65 Kg. / mm²			R. = 85 Kg. / mm²		
	1 Ø 64	2 Ø 44	3 Ø 36	1 Ø 54	2 Ø 36	3 Ø 30

TECHNICAL FEATURES
<ul style="list-style-type: none"> • Completely new projected machine body in monoblock made of spheroidal cast iron; • Gearing in cemented steel; • Reinforced mechanical parts for a better resistance and performance; • Higher Cutting capability; • Special Screw Locator to align perfectly one or more rod between the blades.

OPTIONAL	
	<p><u>BASE AND PEDAL</u> This system is recommended when a working bench is used to lay the bars, allowing the operator to work maintaining a correct posture and minimizing the effort.</p>

STANDARD EQUIPMENT		
		
<p><u>BLADES</u> On each cutting machine, 2 hardened steel blades are already fitted.</p>	<p><u>SCREW LOCATOR</u> Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.</p>	<p><u>LUBRIFICATION SYSTEM</u> Thanks to the new construction system, the parts that require it are easily reached by a single point of grazing.</p>