


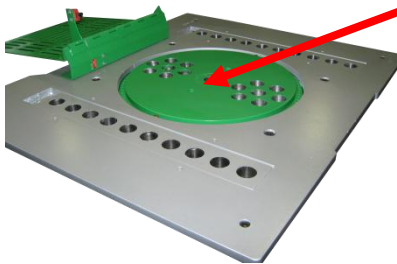
P44 EVO 3-PHASE

	DIMENSIONS (Cm)	Effective 105 x 95 x h.89
		On Pallet 105 x 95 x h.96
	WEIGHT (Kg)	Effective 500
		On Pallet 510
	OIL	SAE = 40 Quantity = 13 lt.
	ELECTRIC MOTOR	400V - 50HZ 4 HP - 3 kW
RPM	6	

Bending capability	R. = 65 Kg. / mm²			R. = 85 Kg. / mm²		
	1 Ø 38	2 Ø 30	3 Ø 24	1 Ø 36	2 Ø 28	3 Ø 22

STANDARD EQUIPMENT

BIGGER ROTATING PLATE: DIMENSION Ø 460 mm:



It can support bushes up to Ø 260 mm to realize bending of big radius without need of extra equipments (Special Arm for large radii).



1 hardened square pin; 1 hardened stirrup bending pin;
3 hardened bush holding pins; 1 checking block; 1 pedal;
7 bushes Ø50-60-70-80-95-120-150mm; 1 set Allen keys .
2 Long Saddles, indispensable to realize the "double bend"!

OPTIONALS



"UNIQUE 2 in 1"
To bend more stirrups simultaneously and determine the length from the bending point.



Spirals/Hoops Device:
Allows to realize spiral/hoop armatures with bars Ø max.16 mm.



"Basic Angle Control" Panel:
Allows to set up manually 6 bending angles, that will be carried out in sequence.



"Angle Control" Panel:
This special computer permits to program up to 20 bending angles in very rapid and intuitive way.



2-Speed Motor:
Available on request for those who work bars of different diameters and want to optimize production times.



Special Bushes for large radii.



Working top "Type B": The cover in sheet metal prevents the turning plate from dust and material residuals.



Roller Bench:

To deposit and move the material. Available in different lengths, as needed.